



MAGNUS™

Step-Up Transformer
Programma® Products

MAGNUS™



Step-Up Transformer

When power systems are put into operation or when faults occur, it becomes necessary to check the instrument transformers to make sure that they are providing test instruments and protective relay equipment with the correct outputs.

MAGNUS™ permits you to prepare excitation curves for instrument transformers quickly and easily.

MAGNUS™ is also used to demagnetize current transformer cores and to conduct turn-ratio tests on voltage transformers. Even though it weighs only 16 kg (35 lbs), it provides 1 A at 2.2 kV. Two-hand control enhances personal safety.

As standard, MAGNUS™ is delivered with a special high-voltage cable and a robust transport case.


Application example

IMPORTANT!

Read the User's manual before using the instrument.

Prepare an excitation curve

1. Connect MAGNUS to the secondary side of the current transformer being tested and also to an ammeter and voltmeter.
2. Increase the voltage with the dial.
3. Jot down the values of U (voltage) and I (current).
4. Repeat steps 2 and 3 until the current (I) rises sharply without any significant rise in voltage (U).
5. Conclude the test by reducing U (voltage) slowly to zero, thereby providing demagnetization.

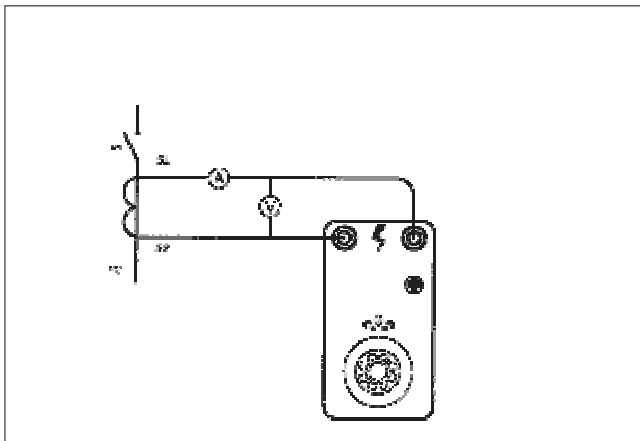

Measuring outputs

Voltage	100/1, (max load of 1 MΩ)
Inaccuracy	±1,5%
Current	10/1
Inaccuracy	±1,5% at 2 A output current ±3% at 0,5 A output current

Outputs

Voltage outputs, AC (CAT I)

230 V mains voltage			
(I) High voltage output ¹⁾		0 – 2200 V AC	
(II) Variable transformer, not isolated from mains ¹⁾		0 – 250 V AC	
Voltage	Current	Max. load time	Rest time
2200 V AC	1 A	30 s ²⁾	10 minutes ²⁾
250 V AC	6 A	Continuous	–
115 V mains voltage			
(I) High voltage output ¹⁾		0 – 2000 V AC	
(II) Variable transformer, not isolated from mains ¹⁾		0 – 110 V AC	
Voltage	Current	Max. load time	Rest time
2000 V AC	1 A	30 s ²⁾	10 minutes ²⁾
110 V AC	10 A	Continuous	–

¹⁾ The outputs I and II must not be loaded at the same time.

²⁾ The load time and rest time for the high voltage output is calculated at the maximum output voltage and current. During an excitation test the voltage and current is only at their maximum level at the end of the test.

Specifications MAGNUS

Specifications are valid at nominal input voltage and an ambient temperature of +25 °C, (77 °F). Specifications are subject to change without notice.

Environment

Application field	The instrument is intended for use in high-voltage substations and industrial environments.
Temperature	
Operating	0 °C to +50 °C (32 °F to +122 °F)
Storage & transport	-40 °C to +70 °C (-40 °F to +158 °F)
Humidity	5% – 95% RH, non-condensing

CE-marking

LVD	Low Voltage Directive 73/23/ EEC am. by 93/68/EEC
EMC	EMC Directive 89/336/EEC am. by 91/263/EEC, 92/31/EEC and 93/68/EEC

General

Mains voltage	115 / 230 V AC, 50 / 60 Hz
Power consumption (max)	2300 VA
Protection	Thermal cut-outs
Dimensions	
Instrument	356 x 203 x 241 mm (14" x 8" x 9,5")
Transport case	610 x 290 x 360 mm (24" x 11,4" x 14,2")
Weight	16.3 kg (35,9 lbs) 26.7 kg (58.9 lbs) with accessories and transport case
High voltage cables	2 x 5 m (16.4 ft) / 1,5 mm ² , 15 kV

Ordering information

Magnus

Complete with:
Cable set GA-00090
Transport case GD-00182

115 V Mains voltage	BT-11190
230 V Mains voltage	BT-12390

Art.No.



Cable set GA-00090

Programma Electric AB
Eldarvägen 4
SE-187 75 TÅBY
Sweden

Tel +46 8 510 195 00
Fax +46 8 510 195 95
E-mail programma@ge.com
Internet www.gepower.com

NOTICE OF COPYRIGHT & PROPRIETARY RIGHTS

© 2005, Programma Electric AB. All rights reserved.

The contents of this document are the property of Programma Electric AB. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with Programma Electric AB.

Programma Electric AB has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of Programma Electric AB.

TRADEMARK NOTICES

Programma® is a registered trademark of Programma Electric AB. IEEE® is claimed as a registered trademark by the Institute by Electrical Electronics Engineers, Inc. The GE logo is registered trademark of General Electric Company.

All other brand and product names mentioned in this document are trademarks or registered trademarks of their respective companies.

Programma Electric AB is certified according to ISO 9001.